### Wattages: 5W, 9W, 14W, 18W



The LED Under Cabinet Light series is a next generation, direct wire under cabinet fixture that Provides task or accent lighting in commercial, retail, hospitality and residential applications.



- UL 1598 suitable for damp locations
- ♦ High efficiency LED Driver, the wide range input voltage AC120V.
- ENERGY STAR certified product (for 3000K and 4000K only) and Title 24 qualified.
- ◆ Dedicated 120V Models are FCC title 47 CFR ,Part 15,Class B for residential and commercial applications.


#### **MOUNTING:**

♦ Surface Mounting

#### **APPLICATIONS:**


- Under and over cabinets
- Display cases
- ♦ Task lighting

- ♦ Office lighting
  ♦ Cover
- ◆ Coves
- ♦ Utility / work areas

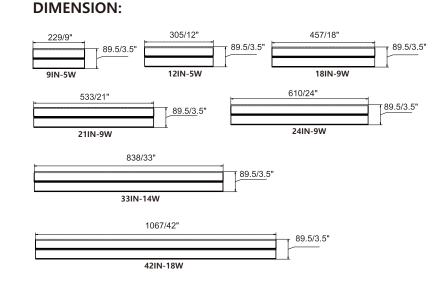

SPECIFICATION				
WATTAGE	5 W	9 W	14 W	18 W
LUMEN	368.44 lm	675.74 lm	1061.9 lm	1283.7 lm
EFFICACY	> 81.37 lm/W	> 77.3 lm/W	> 77.72 lm/W	> 73.86 lm/W
ССТ	3000K,4000K			
CRI	90			
INPUT VOLTAGE	AC120V			
BEAM ANGLE	117°			
POWER FACTOR	0.90			
DRIVER EFFICACY	90%			
DIMMING	traic dimming			
LIFE S	over 50,000 hrs			
WORKING TEMPERATURE	-22°F ~ 113°F			
STORAGE TEMPERATURE	-40°F ~ 176°F			
OUTDOOR RATING	damp location			
CABLE	none			
WARRANTY	5 year limited			

### Wattages: **5W, 9W, 14W, <u>18W</u>**

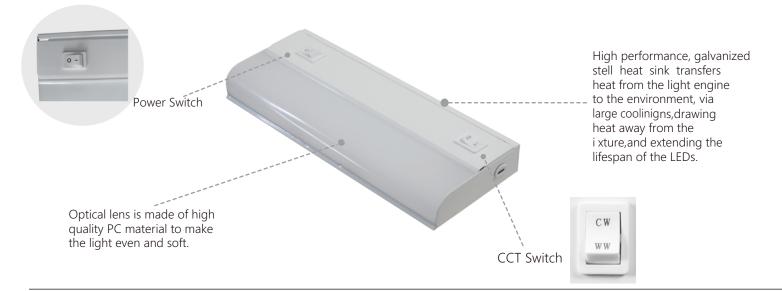

### **Structure Features:**

- Shell materials: Metal & PC
- Finish:White(Standard)
- Length:229/305/457/533/610/838/1067mm
  (9"/12"/18"/21"/24"/33"/42")
- Width:29mm(3.5")
- Net weight : 9-42IN:0.36/0.46/0.58/0.71/0.77/1.1/1.4(kg) 0.79/1.01/1.28/1.57/1.70/2.43/3.09 (lbs)

### **Packaging information**

#### + UC9IN05W12-34K

274mmX220mmX206mm(10 Pcs/CTN) (10.79"X8.66"X8.11")


#### + UC12IN05W12-34K

320mmX220mmX206mm(10 Pcs/CTN) (12.60"X8.66"X8.11")

#### ORDERING INFORMATION

EXAMPLE:


### UC9IN05W12-XXK

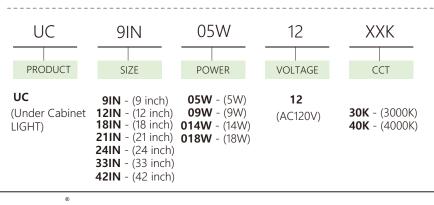


- UC18IN09W12-34K
  472mmX220mmX206mm(10 Pcs/CTN)
  (18.58"X8.66"X8.11")
- UC21IN09W12-34K
  548mmX220mmX206mm(10 Pcs/CTN)
  (21.57"X8.66"X8.11")
- UC24IN09W12-34K
  626mmX220mmX206mm(10 Pcs/CTN)
  (24.66"X8.66"X8.11")
- UC33IN014W12-34K
  853mmX220mmX206mm(10 Pcs/CTN)
  (33.58"X8.66"X8.11")
- UC42IN018W12-34K
  1082mmX220mmX206mm(10 Pcs/CTN)
  (42.60"X8.66"X8.11")

## Wattages: 5W, 9W, 14W, 18W


#### PHOTOMETRICS




#### UC12IN05W12-34K





#### UC18IN09W12-34K





#### UC21IN09W12-34K























# Wattages: 5W, 9W, 14W, 18W

#### PHOTOMETRICS

