

LED HIGH BAY
Luminaire



ETLB7-Series

ETLB7-2FT



ETLB7-4FT



PRODUCT FEATURES

The ETLB7 is the lighting solution for a wide variety of applications and mounting heights. Precision-designed optics, multiple distributions, and a choice of lumen outputs and color temperatures make the energy-efficient ETLB7 the ideal solution for industrial, commercial and other high bay applications.



ETLB7-2FT/4FT-4L

- **Rated Life**
More than 100K hours per L70 TM-21 @ 80 °C

- **Optical options:**
V(30°)*H(30°) Narrow Distribution
V(60°)*H(60°) Narrow Distribution
V(90°)*H(90°) Medium Distribution

Other customized angles or combinations of optics to meet specific illuminating performance is available.


- **Ratings**
DLC Listed
RoHs
UL 1598 suitable for damp locations
UL 8750 LED equipment in Lighting Products
Temperature Rated at(-20°C to +50 °C)(-4°F to 122°F)
The 0-10V Dimming type is continuous
The product can dim to 10%

- **Mounting**
Chain or Cable mounting ready
Surface Mounting, Pendant Mounting and Suspending Mounting


- **Applications**
Designed to meet recommended luminance and illuminance requirements for High bay and Low bay applications.

DIMENSIONS:MM

ETLB7-2FT
Length: 605(23.8")
Width: 320/440(12.6"/17.3")
Depth: 92.5(3.6")
Weight: 4.60/5.70(kg)

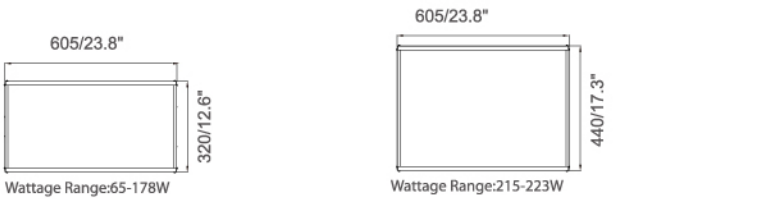

ETLB7-4FT
Length: 1166(45.9")
Width: 320/440(12.6"/17.3")
Depth: 92.5(3.6")
Weight: 8.10/9.60(kg)

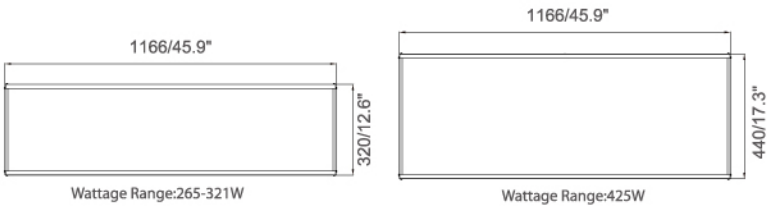

ORDERING INFORMATION

Sample Number:
ETLB7-2FT/2L/BLS/65/YDM/FL 840 (A1,A3+B3+C1+EM)

Series	Size	Module	Module Type	Number	Dimming	Lens
ETLB7=LED Highbay Type 07	2FT 4FT	2L 3L 4L 6L	BLS BLM BWM	XX can be any data	YDM=0-10V Dimming NDM=NONE Dimming	FL=FROSTED LENS CL=CLEAR LENS WL=WITHOUT LENS

Voltage	Color Temp	LED Driver	LED Package	Sensor	Battery Back-up	Shielding
BLANK=120-277 120-347 347S 347-480	840 4000K 850 5000K	A1=Espen A3=Simon	B3=SEOUL 3528	BLANK=NO SENSOR C1=HYTRONIK HC403V-RC C2=MERRTEK MC054V-RC	BLANK=NO EM EM	V-Hook V-Hook+Chain Cable Wireguard Surface Pendant Suspending

REFERENCE WATTAGE

ETLB7-2FT 5000K		ETLB7-4FT 5000K	
Lumens Rated	Wattage 130LM/W	Lumens Rated	Wattage 130LM/W
8515	65	34715	265
11790	90	42051	321
13755	105	55675	425
14410	110		
17685	135		
21222	162		
23318	178		
28165	215		
29213	223		