Residential Down lights

KOK-4CT0830/40/50LRWH



Description:

Residential downlights are inexpensive, durable, and are available in 4", 5", 6".

CCT- 3000K , 4000K , 5000K

Installation:

MC cables and junction box allow for flexibility during installation process.

Electrical:

• Dimmable

Construction:

Polycarbonate driving housing with aluminum reflector, and fire proof junction box

APPLICATIONS:

Gymnasium

• Industrial Areas

Warehouses

Hotels

• Shopping Centers

Toll Stations

• Indoor Spaces

Garages

Commercial

Hotels

SPECIFICATIONS:

DETAILS:

ORDER NUMBER	PT-DL-4I/8W-3CCT
LIFESPAN	50,000 HRS
IP RATING	44
BEAM ANGLE	100 °
THD	20%
WEIGHT	2 LBS
WATTAGE	8W
CCT	3000K / 4000K / 5000K
LUMENS	580lms / 620lms / 660lms
CRI	>90
LIGHT EFFICIENCY	80 lumens/watt
DIMMING	YES
VOLTAGE	AC120V
POWER FREQUENCY	50 Hz
LED DRIVER	WeLedPower
WORKING TEMPERATURE	-40°F - +122°F
Power Factor	0.9
CERTIFICATIONS	ETL, FCC, CE, Energy Star










DIMENSIONS:

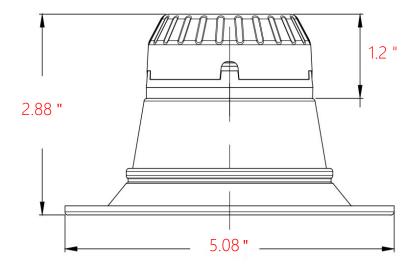

PHOTOMETRICS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

PLANAR ISOLUX DIAGRAM (UNIT: 1x)

