

LS-ES007SR

LED Emergency Exit Light



FEATURES

Injection-molded thermoplastic ABS housing

UL-94V-0 flame rating, fire-resistant

Input Voltage: 120/277V

Power consumption: 3.5W max.

Output: 3W max.


3.6V Nickel Cadmium Battery

Charging time: 24 hours


Discharge time: 90 minutes

Operating temperature: 0°C~40°C

Dimension: 299*184.5*44.6mm

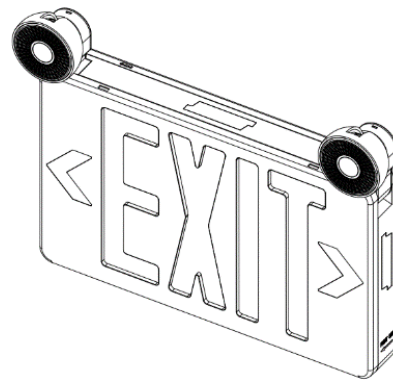

PHOTOMETRIC

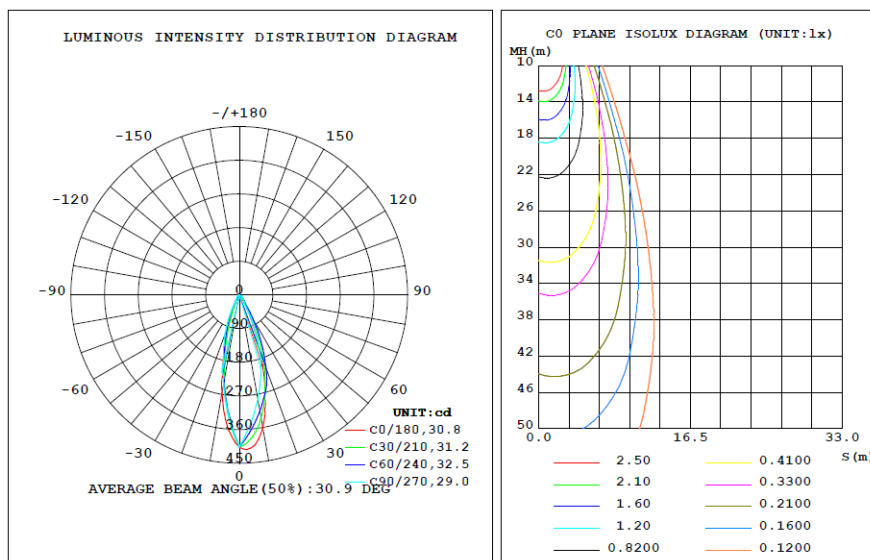

ORDER INFORMATION

Model	Voltage	Color	Emergency Duration	Certificate
LS-ES007SR	120/277V	Red	90 minutes	UL
LS-ES007SG	120/277V	Green	90 minutes	UL