

PT-DLSM-R Series

Round LED Surface Mount Downlight with Multiple CCT

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------


DESCRIPTION

Surface mounted downlights are an ideal solution when recessed fixtures are not an option. Available in multiple apertures, the DLSM Series features color tunable technology that lets the user choose between 3000K, 4000K, or 5000K.

Ideal for drop ceilings, closets, attics, hallways, bathrooms, kitchens, basements, entry ways, porches (covered ceiling only), garages, stairwells, corridors, nursing/retirement homes, condos, elevators, apartments, and any other small areas with limited space.



TUNABLE 3-1 CCT SELECTOR

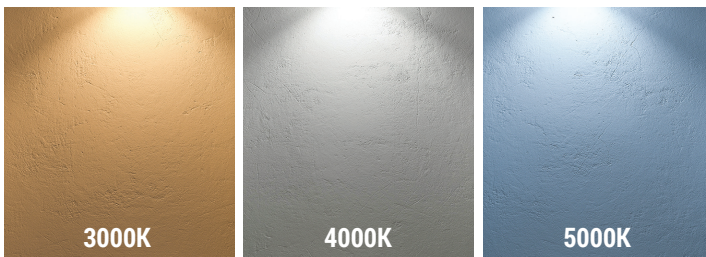

Easily flip the switch for desired CCT. It's that simple!

FEATURES

- Edge-lit technology, with no glare or dark spots
- Instant-on
- Slim design
- Integrated LED fixtures
- LED technology fits anywhere you need general light source
- IC rated for direct contact with insulation
- Damp location rated
- Easy to install on standard J-box

DIMMING


Triac dimmable down to 100%-10%.
Compatible with most major brands of dimmers.

LISTING

ETL Listed, FCC, RoHS, CE & Energy Star Listed

TECHNICAL SPECIFICATION

WATTAGE	10W / 15W / 18W / 22W
LUMENS	600 / 900 / 1100 / 1400
EFFICACY	up to 63 lm/W
VOLTAGE	120V
POWER FREQUENCY	50/60 Hz
CCT	3000K 4000K 5000K
CRI	90
BEAM ANGLE	120°
RATING	Suitable for damp locations
DIMMABLE	Triac dimming
POWER FACTOR	>0.9
WARRANTY	5 year limited



EM-DLSM-R-7I (Sold separately)

Emergency Battery Back-up for
7" LED Round Surface Mount




MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	VOLTAGE
PT-DLSM-S-5I-10W-3CCT	10W	600*	60	3000K/4000K/5000K	90	120V
PT-DLSM-S-7I-15W-3CCT	15W	900*	60			
PT-DLSM-S-9I-18W-3CCT	18W	1100*	61			
PT-DLSM-S-12I-22W-3CCT	22W	1400*	63			

*Default @ 3000K

PT-DLSM-R Series

Round LED Surface Mount Downlight with Multiple CCT

Project Name:	Notes:	Date:	Type:
---------------	--------	-------	-------



Easily flip the switch for desired CCT



• Sealing gasket standard

AVAILABLE TRIM RING OPTIONS *(Sold separately)*



Black




Bronze




Brush Nickel

DIMENSION



A (Diameter)



MODEL#	A	B
PT-DLSM-R-5I	5.4"	.67"
PT-DLSM-R-7I	8"	.67"
PT-DLSM-R-9I	9"	.67"
PT-DLSM-R-12I	12"	1"

RECOMMENDED DIMMER

LUTRON

- PD-6WCL
- DVCL-153P
- CTCL-153P
- MACL-153M
- TGCL-153P
- LGCL-153P

LEVITON

- 6681
- 6672

MOUNTING OPTION

The junction boxes listed below are meant to be a reference list only. Junction box sizes may vary. It is the responsibility of the individual performing the installation to confirm that the fixture can properly and safely work with any junction box.



4" octagon/steel box



4" octagon/steel box



3-1/2" round/plastic box



4" round/plastic box



4" round/plastic box with bar hanger assembly

(For through circuit wiring applications, recommended j-box size is 2-1/8" deep)

Round LED Surface Mount Downlight with Multiple CCT

PT-DLSM-R-5I	<i>Wattage: 10W</i>	<i>Delivered lumens: 710</i>	<i>Efficacy: 71 lm/W</i>	<i>CCT: 4000K</i>	<i>CRI: 90</i>
---------------------	---------------------	------------------------------	--------------------------	-------------------	----------------

